

# LBT Series LiFePo Battery 48 Vdc 50 Ah



LBT Series maintenance free rack mounted Lithium-ion rechargeable batteries are ideal for Telecom applications.

State-of-the-art automated manufacturing ensures consistency and reliability.

Lifetime of up to 15 years, or 6,000 cycles 80% SoC.

## FEATURES

### Battery Management System (BMS)

- State of charge and health management
- PC management and monitoring software
- RS232 and RS485 communications
- Alarms
- Data storage

### Operation at Extreme Temperatures

- Charging 0°C to +50°C
- Discharging 0°C to +60°C

### Easy Handling

- Rack mount - 19 inch
- Height - 3U
- Parallel up to 15 batteries

### Options


- LCD display screen

# LBT Series LiFePo Battery 48 Vdc 50 Ah

## SPECIFICATIONS

### LBT 4850

Nominal voltage	51.2 Vdc
Nominal capacity	50 Ah / 2.56 kWh (0.2 C, to 43.2 V, at 25° C)
Charging cut-off voltage	58.4 Vdc
Discharging cut-off voltage	40 Vdc
Standard charging current	10 A
Max charging	50 A
Standard discharging current	10 A
Max discharging current	50 A
BMS power consumption	< 1.5 W
H x W x D mm	132.5 x 480 x 383.2
Weight kG	27
Discharging temperature	0° to +60° C
Charging temperature	0° to +50° C
Storage temperature	15° to 25° C
Humidity	< 80 %
Environment	IP 30
Protection	Over-current, over-voltage, under-voltage, over-temperature, short-circuit
Parallel	up to 15
Communications	RS232, RS485
Monitoring	PC Software (RS 485 or Modbus)
Standards	IEC 62619, IEC 21A/556CD, RoHS, UN/DOT 38.3, EN 61000-6-1, EN 61000-6-3, EN 55032, EN55024

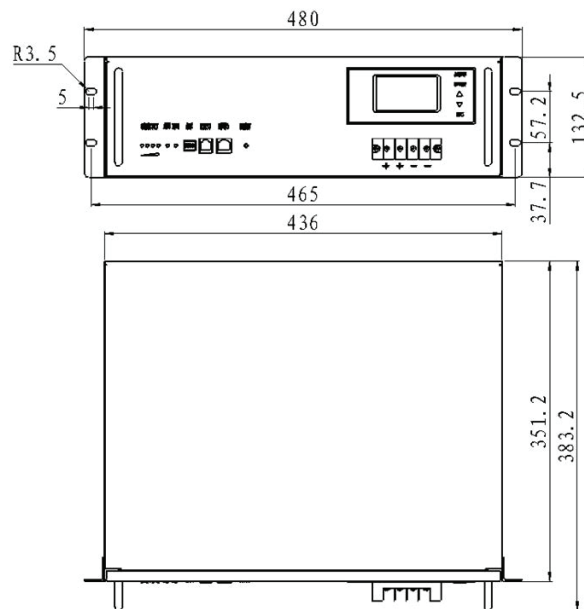

© Keatec Energy. All rights reserved. Keatec Energy reserves the right to change specifications without notice.  
DS Keatec LBT Series LiFePo Battery 48V 50A English 20180112